

Model: LXH-15A2-20A2

Volumetric Water Meter

Feature:

- Pre-equipped for Pulse emitter
- Volumetric piston type
- Material body: Brass
- Size: DN15 to DN20mm, (1/2"-3/4")
- Available for cold water (50°C)
- Accuracy: Class C / R160 / R200

Pre-equipped For
Pulse-emitter



Main Technical Data:

According to IS04064(GB/T778.1-1996) Standard

Size		Class	Qs	Qp	Qt	Qmin	Min Reading	Max Reading
DN(mm)	Inch		Overload Flow	Nominal Flow	Transitional Flow	Min Flow		
			m ³ /h		L/h		m ³	
15	1/2"	C	3	1.5	22.5	15	0.0001	9999
20	3/4"	C	5	2.5	37.5	25	0.0001	9999

According to IS04064(GB/T778.1-2007) Standard



DN Size	Mm Inch	15 1/2"	20 3/4"
Q4(m ³ /h)		3.125	5
Q3(m ³ /h)		2.5	4
R160	Q2(L/h)	25	40
	Q1(L/h)	15.625	25
R200	Q2(L/h)	20	32
	Q1(L/h)	12.5	20
Min reading(m ³)		0.0001	0.0001
Max reading(m ³)		9999	9999
Max pressure(MAP)		16	16
Max loss(Δ P)		63	63
Max temperature		T50	T50

Model: LXH-15A2-20A2

INDICATING ERROR


At low zone is $\pm 5\%$ from minimum flow rate (q_{min}) to transitional flow rate (q_t) exclusive boundary
 At high zone is $\pm 2\%$ from transitional flow rate (q_t) to overload flow rate (q_s)

Head Loss and Error Curve:

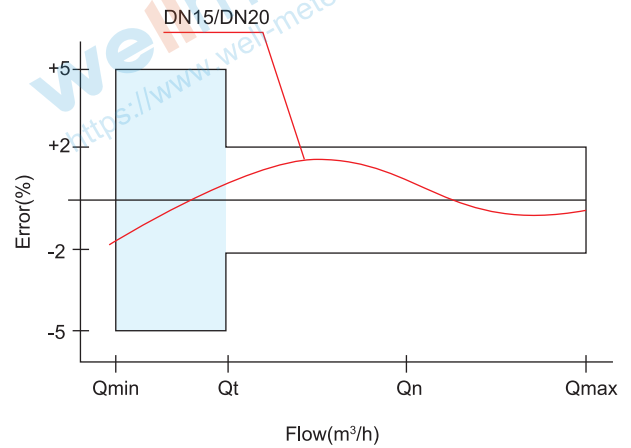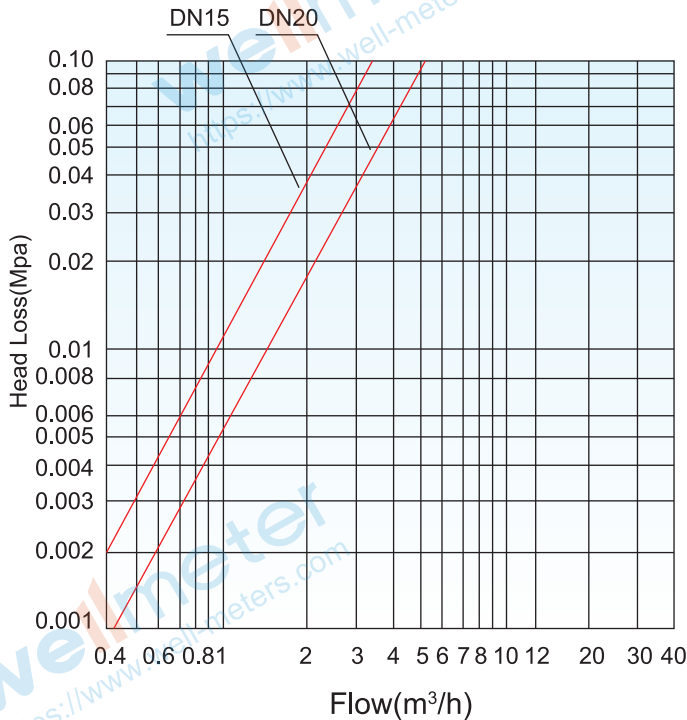

Dimensions and Weight:

Meter Size Dia DN	L Length	L1 Width	W Height	Connecting Thread D	Weight Kg
(mm)	(mm)				
15	115	191	86	G 3/4B	1.00
20	130	228	86	G 1B	1.20

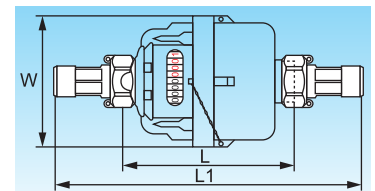

WORKING CONDITION:

Water temperature: $\leq 50^{\circ}\text{C}$ for cold water meter
 Working pressure: $\leq 1.6\text{Mpa}$